

# LEV 600 and LEV 300

## ◀ LEV 600

## LEV 300 ▶

For gripping and conveying all types of boxes

### Specifications :


- Grip width between 500–1000 mm
- Lift height up to 3.50 m
- Max. load:  
600 kg up to 1.70 m\*
- Length of forks:  
585 mm and 735 mm  
with sliding plates

### Specifications :

- Grip width between 400 – 800 mm
- Lift height up to 3.00 m
- Max. load:  
300 kg up to 1.70 m\*
- Length of forks:  
570 mm and 720 mm  
with sliding plates.

\*For taller lift heights, please contact us.

The LEV 600 and the LEV 300 designed to convey loads that cannot be handled with a conventional stacker. They are particularly suited for moving loads sitting directly on the floor.

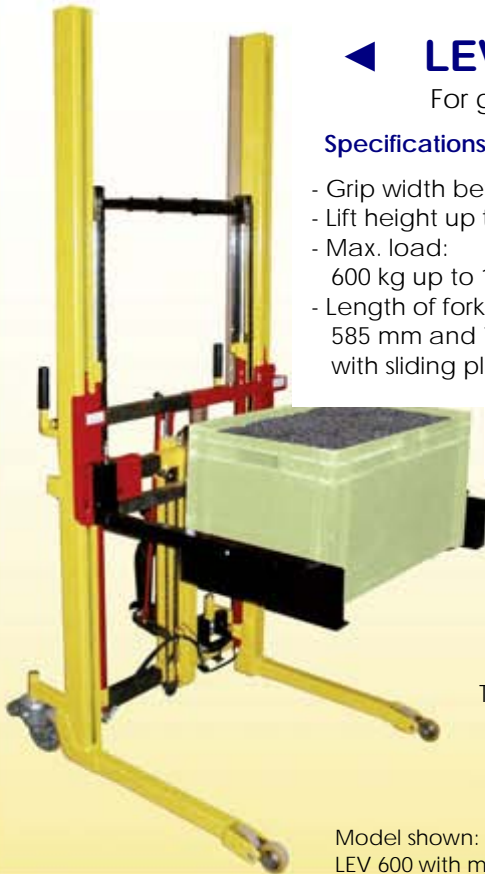

Model shown:  
LEV 600 with manual lift and drive



Model shown:  
LEV 300 with manual lift and drive



## LEV 600 and LEV 300 ROTO-BAC

### LEV 600 ROTO-BAC

### LEV 300 ROTO-BAC DUPLEX

Allows operators to grip, lift and rotate metallic or plastic boxes up to 180°.

### Specifications :

- Max. load :  
350 kg up to 1.70 m
- Grip width:  
up to 800 mm  
with a centre  
of gravity  
at 670 mm  
from carriage.



Model shown is a LEV 600  
with manual drive, lift and rotation,  
with plastic box.

### Specifications :

- Max. load :  
120 kg up to 1.70 m
- Grip width:  
up to 600 mm  
with a centre  
of gravity  
at 605 mm  
from carriage.



Model shown is a LEV 300  
with manual drive, electro-  
hydraulic lift and manual  
rotation, with plastic box.



Unit F1  
Maynooth Business Campus  
Maynooth, Co Kildare  
Ireland

Tel: +(353) 1 6016106  
Fax: +(353) 1 6016109  
e-mail: [info@liftrite.ie](mailto:info@liftrite.ie)  
web: [www.liftrite.ie](http://www.liftrite.ie)