

Logiflex - flexible handling of goods

High flexibility and efficiency - with only one truck, goods can be transported, lifted and handled in many different ways.

The design puts focus on the safety and ergonomic working conditions of the user - Logiflex can be adjusted to the individual user, and the ergonomic correct handle ensures the user a relaxed hold.

Optimum utilisation of the space - Logiflex has a compact construction and is very manoeuvrable.

High quality is ensured through an extended test programme and in cooperation with experts in Health and Safety.



Technical Specifications

Optimum safety for the user through

- central location of all control buttons on the handle
- transparent and impact-resistant safety screen on the mast
- location of parking brake

Strong construction ensures a long operating life and low maintenance costs.



Ergonomic handle ensures the user a relaxed hold. The handle can be marked with the name/department.



High manoeuvrability: Short overall length, large turning angle, assisted steering and low own weight.



Adjustable forks are available as optional extra in many different lengths and types.

Available with manual and electric lifting.

Product (measured in mm)	LF	LF	LF	LF	LF	LF	LF	ELF	ELF	ELF	ELF	ELF	ELF	ELF	ELF	ELF							
Capacity in kg	1000	1000	1000	1000	1000	1000	1000	1000/1200	1000/1200	1000/1200	1000/1200	1000	1000	1000	1000	1000							
Lifting height	h ₃	920	1200	1400	1600	1910	2050	2450	920	1200	1400	1600	1910	2050	2450	2850							
Fork length	l	600**, 800**, 1150, 1520***						600**, 800**, 1150, 1520***															
Overall height	h ₁	1330	1530	1730	1930	2240	1530	1730	1330	1530	1730	1930	2240	1530	1730	1930							
Overall width	b ₁	680						680								932							
Fork span	b ₅	480, 560, 680		560, 680				480****, 560, 680		560, 680													
Length without forks	l ₂	415						590															
Overall length with 1150 forks	l ₁	1625					1635		1800					1810									
Overall height	h ₄	Without telescopic mast					2490		2890		Without telescopic mast					2490		2890		3290		3740	
Lowered height	h ₁₃	85		90				85		90													
Load centre	c	l/2						l/2															
Fork width	e	163						163															
Run-in length	l _x	1100 with 1150 mm forks						1100 with 1150 mm forks															
Gangway (pallet: 1200 x 800)	A _{st}	2150*****		2190 *****				2250*****		2290*****													
Free lift	h ₂						190							190									
Turning angle of the wheels		180°						180°															
Pump motor								1,1 kW 12 V															
Lifting speed		normal/quick: 8/26 mm per pump						With/without load: 0,05/0,07 m/s															
Lowering speed with/without load		max. 0,19 m/s / max. 0,07 m/s						0,12 m/s / 0,07 m/s						0,12 m/s / 0,08 m/s									
Weight in kg (without battery):		194	213	220	224	232	278	286	222	241	247	251	259	302	309	322							
Capacity 1000/1200 kg																371							

* Load reduction at large lifting height.

** Maximum lifting height 1600 mm with 600 mm forks, maximum lifting height 2450 mm with 800 mm forks.


*** Reduced capacity 750 kg. Not available for 1200 kg models.

**** Only for 1000 kg models.

***** Tests show that 1700 mm are enough.



Available with side-tilting forks and/or optional extras, e.g. drum turner, crane arm, spear, remote control, level control.

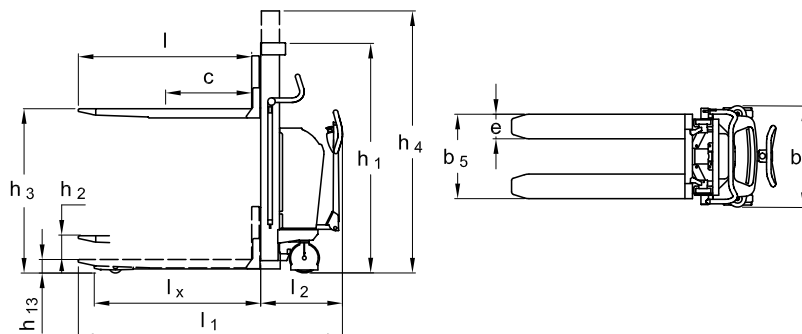

We also offer tailor-made solutions.

Please ask for further information or visit our website www.logitrans.com



Unit F1, Maynooth Business Campus
 Maynooth, Co Kildare, Ireland
 Tel: +(353) 1 6016106 • Fax: +(353) 1 6016109
 e-mail: info@liftrite.ie • web: www.liftrite.ie